


The Original RIBBON® Rack

IDSA National Design Award Winner
Permanent Design Collection - MUSEUM OF MODERN ART

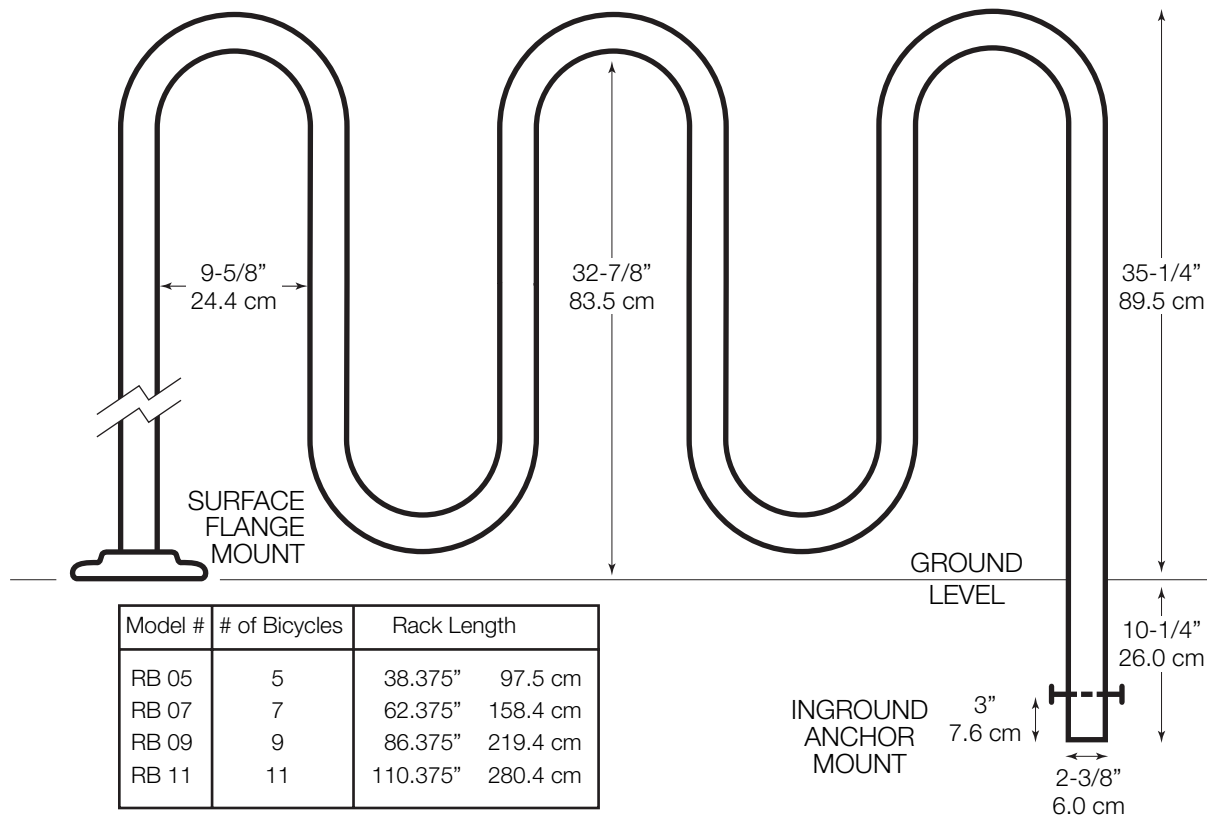

Model #	# of Bicycles	Rack Length	
RB 05	5	38.375"	97.5 cm
RB 07	7	62.375"	158.4 cm
RB 09	9	86.375"	219.4 cm
RB 11	11	110.375"	280.4 cm

Specifications

All standard units made from ASTM A53/A500 SCHD 40 steel pipe (2.375" OD X .154 wall), hydraulically bent with a mandril, hot-dipped galvanized after fabrication.

The RIBBON® RACK is available in ASTM A312 SCHEDULE 40 TP 304 stainless steel, satin #4 finish—optional and extra.

Installation Methods

Inground Anchor Mount—standard

Surface Flange Mount—optional and extra

General Information

Delivery time: Six weeks or sooner from receipt of order.

Important Considerations

Colors: (Painting/Coating)—Painting or coating the rack will result in a maintenance problem, as no coating will withstand the abuse of the bicycles. Powder coating cannot be maintained; an enamel finish will chip. AAA RIBBON RACK CO. has the best solution where color is essential. Please contact us to find out how to achieve an appropriate color with a minimum of maintenance.

Materials: Steel tubing or aluminum are not suitable materials for a bicycle rack. Pre-galvanized material will flake and crack during manufacture. AAA RIBBON RACK CO. uses heavy-duty steel pipe, hot-dipped galvanized after fabrication to provide security and durability.

Manufacture: Hydraulic bending with a mandril, as used by AAA RIBBON RACK CO., insures smooth and aesthetic curves on the Ribbon® Rack. Press bending leaves an indentation; other methods flatten outer curves and crimp inner curves.

Specifying / Estimating / Ordering

Please use the following notations:

Quantity

